



1.General

This NM8N High-voltage (HV) Series Molded Case Circuit Breaker is specially designed for handling high-voltage electrical system, capable to break heavy loaded electrical circuit systems under wide range of operating temperature of - 40 °C ~ + 70 °C . The characteristics of this Circuit Breaker is its capability to break circuit with zero arcing, which is an ideal component for meeting the requirements of many systems such as the solar (PV) power generation system. This Circuit Breaker works perfectly up to the maximum working voltage of AC 1150V, which can effectively protects electrical systems like the output loading of the string Inverters, and others such as the loading capacity of the AC combiner box in the photovoltaic systems.

2. Operating conditions

2.1 Temperature:

Operating and storage temperature is -40° C~+70° C; the average value

within 24 hours does not exceed +35° C; when the ambient temperature is

-40° C~+70° C, users need to consider derating or temperature compensation

whose details can be referred to in Page

2.2 Altitude: ≤ 2000m;

2.3 Pollution grade: Grade 3;

2.4 IP grade: IP40

2.5 Air conditions:

At mounting site, relative humidity not exceed 50% at the max temperature of +40 °C , higher relative humidity is allowable under lower temperature. For example, RH could be 90% at +20 °C , special measures should be taken to occurrence of dews.

3.Type designation

Model fast selection guide

NM8N	-	630	HV	S	TM	630	3P
MCCB	Frame current	High voltage	Breaking capacity	Release Code	Rated current	Number of poles	
250 : 250A 400 : 400A 630 : 630A		@AC800V C: 36kA S: 50kA	TM: Thermomagnetic M: Magnetic	250: 63-80-100-125-160 180-225-250 400: 250-315-350-400 630:400-500-630	3 poles		

Note: example of model purchase

NM8N-630 HV S TM 630 3P

This means to order an NM8N high voltage (HV) series, with 630 frame, breaking capacity of 50kA, thermomagnetic power distribution protection type, rated working current 630A, 3 poles AC moulded case circuit breaker.

4. Technical data

Model	NM8N-250HV		NM8N-400HV		NM8N-630HV	
Frame Current In(A)	250		400		630	
Rated Current In (A),40°C	63-80-100-125-160-180-200-225-250		250-315-350-400		400-500-630	
Insulation Voltage Ui (V)		1250				
Rated impulse withstand voltage Uimp (kV)	8		12		12	
Rated Voltage Ue (V)			690/800/1000/1150			
Number of Poles	3P					
Breaking Capacity	C	S	C	S	C	S
Rated Ultimate Breaking Capacity Icu (kA) ¹	AC690V	50	80	50	80	80
	AC800V	36	50	36	50	50
	AC1000V	15	30	25	35	35
	AC1150V	10	10	10	10	10
Rated Service Breaking Capacity Ics (kA)	AC690V	50	80	50	80	80
	AC800V	36	36	36	50	50
	AC1000V	15	15	15	20	20
	AC1150V	10	10	10	10	10
Release type	TM (Thermomagnetic type) ,M (Magnetic type)					
Mechanical Durability	15000		15000		15000	
Electrical durability	1500		1500		1500	
Outline sizes	Width	106		140		140
	Height	200		250		250
	Depth	120		135		135



Theromagnetic Release Data Sheet

Theromagnetic type Release (TM)	250	400	630
Number of Poles	3P		
Current specification	63-80-100-125-160-180-200-225-250	250-315-350-400	400-500-630
Over-load Protection			
Current setting (A) Ir=InX Accuracy	0.7-0.8-0.9-1.0		
Short-circuit Instantaneous Protection			
Current setting (A) Ii=InX Accuracy (%)	10(63A ~ 100A) 7-8-9-10-11-12(125A ~ 160A) 5-6-7-8-9-10(180A ~ 250A)	±20	5-6-7-8-9-10

5.2 Magnetic type Release (M)

5.2.1 Motor Startup Characteristics

Most of power motors adopt three-phase asynchronous induction motors (AIM) design for various applications in the industry. Most AIMs use direct startup strategy known as the Full-Voltage starting, which starts the motor by feeding unlimited electric power directly into the motor. The asynchronous motor needs a very large startup current in the range of approximate 4 - 7 times of the rated current to kick start the motor, the high current is needed due mainly to the inertia of the motor when it is kick started from its idle state. Although the revolving speed of the rotor cannot reach its normal rated speed instantaneously during the kick-starting stage, the relatively high speed of the rotor windings cuts the magnetic field at a high speed, thus producing very large current in the motor system. This large current in the rotor induces a large magnetic field which in turn interacts with the stator winding, resulting in a rapidly increase of current loading in the system.

5.2.2 Startup Parameters

Rated Current (In): The rating of the electric current of the motor under normal operation.

Startup Current (Id): The start up current of the motor which is rated at an average of $7.2 \times In$, dependent on the operation conditions.


Startup Peak Current (Id'): The transient current during the first two half cycling waves after the motor is powered up is generally in the order of $14 \times In$.

Startup Time (td): The startup time for starting the motor from idle to fully operation stage is generally approximate 0.5s - 20s.

5. Release

5.1 Theromagnetic type Release (TM)

The setting value of Theromagnetic type Release (TM) of NM8N-250HV, 400HV and 630HV High-voltage (HV) Series Molded Case Circuit Breakers can be adjusted to meet the protection requirements.

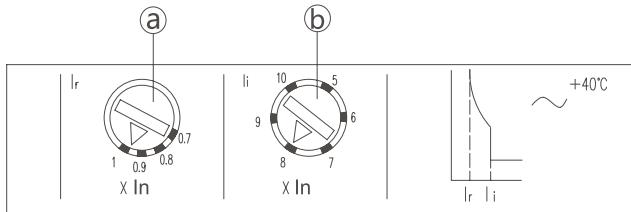

5.2.3 The Important Roles of the Protection Device in the Direct Startup System

When the conventional tripping current of the magnetic Release is not set properly in the electric rotor system, the Circuit Breaker may operate mistakenly by considering the large startup current of the motor as the system is in the short-circuit state. Similarly, the heat that has been generated by the large startup current during the kick start state of the motor, will cause the thermal relay to trip off the system mistakenly. In the case of a contactor system it is necessary to ensure the current can be disconnected from the motor during the startup stage, especially when the motor needs an electric or regenerative braking capability. This can be achieved by reducing the capacity of the system generally. Hence to avoid the misoperation of protection device within the motor system that caused by the influence of the start up current, the following conditions are advised to follow:

- To ensure the entire inverse time characteristic curve of the independent thermal relay well above the start up current.
- To ensure the short-circuit current trip setting of the Circuit Breaker that with magnetic protection capacity, should be greater than the peak startup current of the motor.


5.2.4 Protection Scheme

This NM8N-HV Series Product has been designed for providing solutions for the starting up, to control and to protect all different variants of three-phase asynchronous motor systems.

Three elements protection adopts: electromagnetic Protection Circuit Breaker + Contactor + Thermal Relay

Electromagnetic Protection Circuit Breaker can be used for short-circuit protection, the Contactor can be used for motor operation, and the Thermal Relay can be used for system overload, phase loss and phase imbalance protections.

The current range of Electromagnetic Protection Circuit Breaker is 63-630A, the adjustable range is 9~14In, and the accuracy is 20%. It is especially suitable for application in the classical three elements protection scheme.


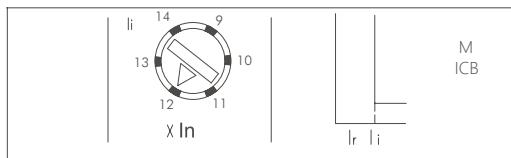


Magnetic Release Data Sheet


Magnetic type Release (M)	250	400	630
Number of Poles	3P		
Short-circuit Instantaneous Protection			
Current setting (A) Ii=InX	12(63A ~ 100A) 9-10-11-12-13-14(125A ~ 250A)	9-10-11-12-13-14	
Accuracy (%)	±20		

6.Tripping Curve


6.1 Tripping Characteristic Curve of Power distribution Protection

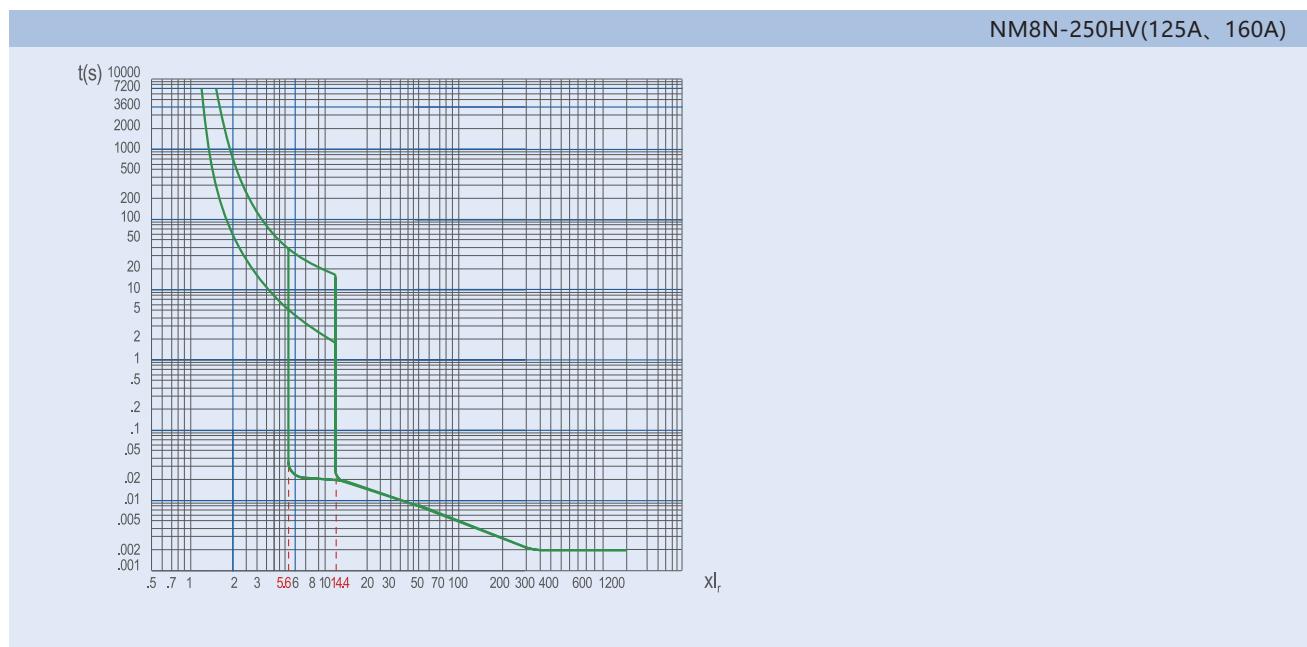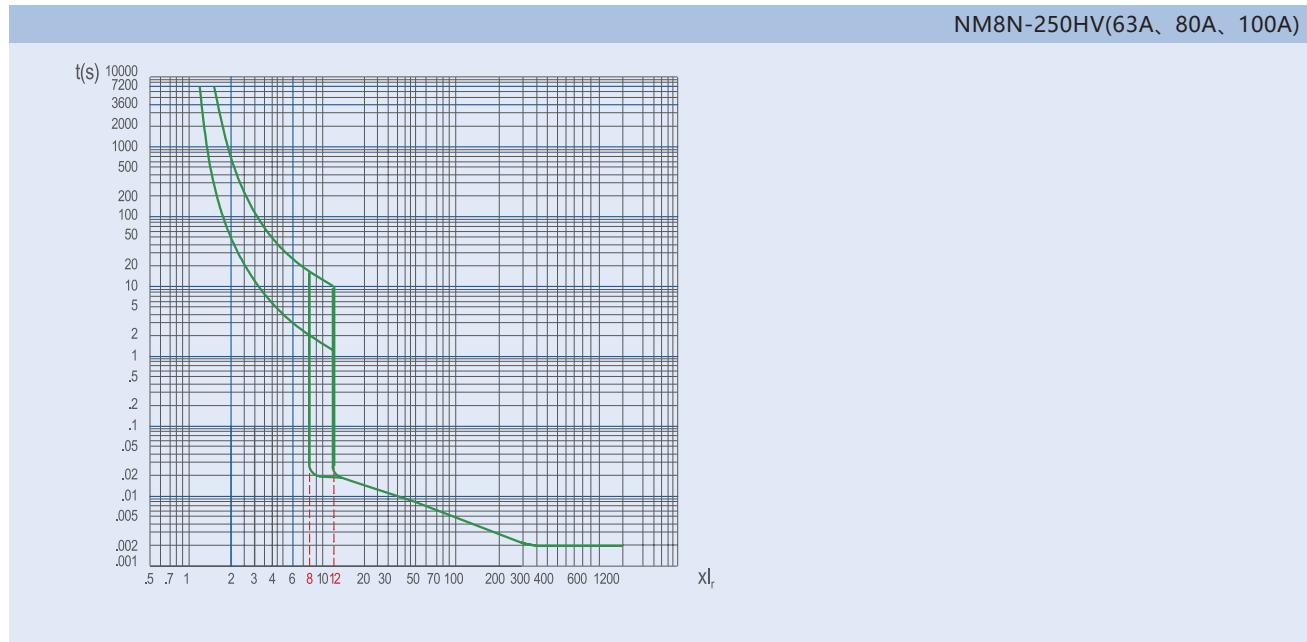


NM8N-250HV(180A, 200A, 225A, 250A)

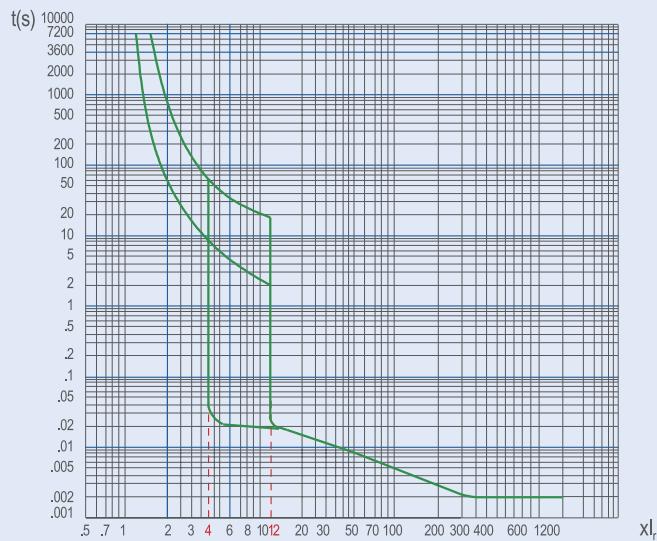



NM8N-400HV(250A, 315A, 350A, 400A)

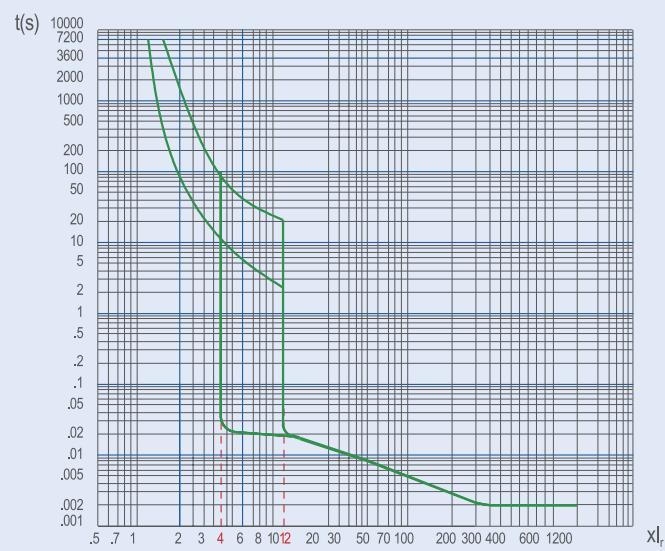


NM8N-630HV((400A,500A and 630A))

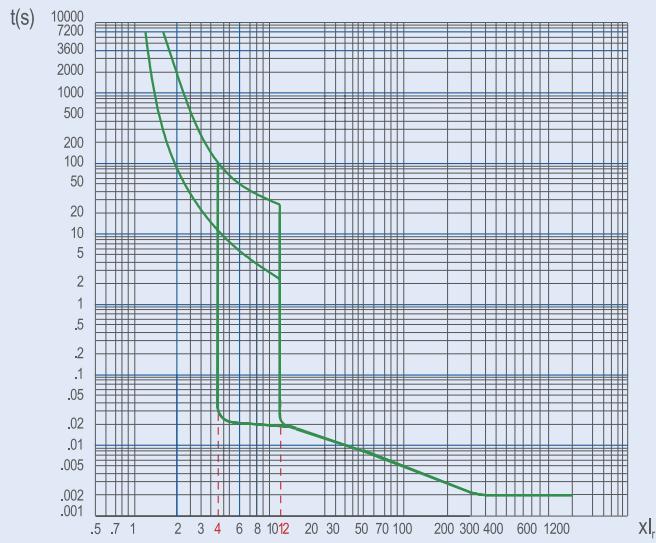


6.2 Tripping Characteristic Curve of Motor Protection

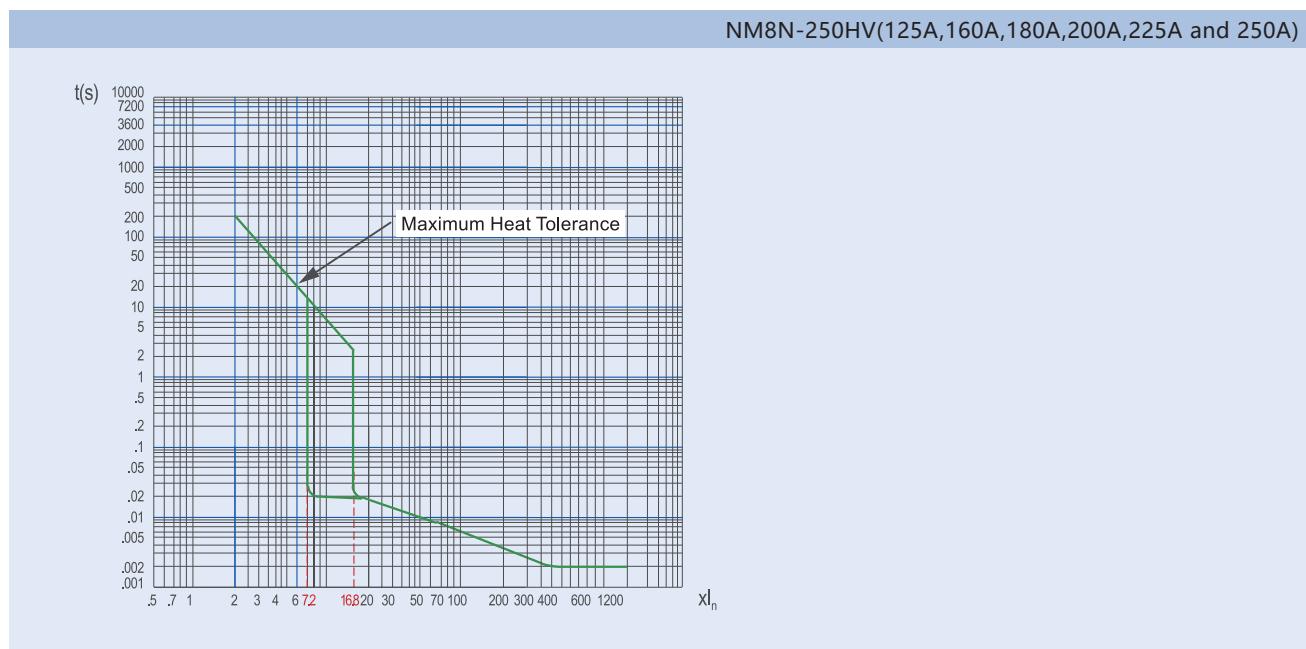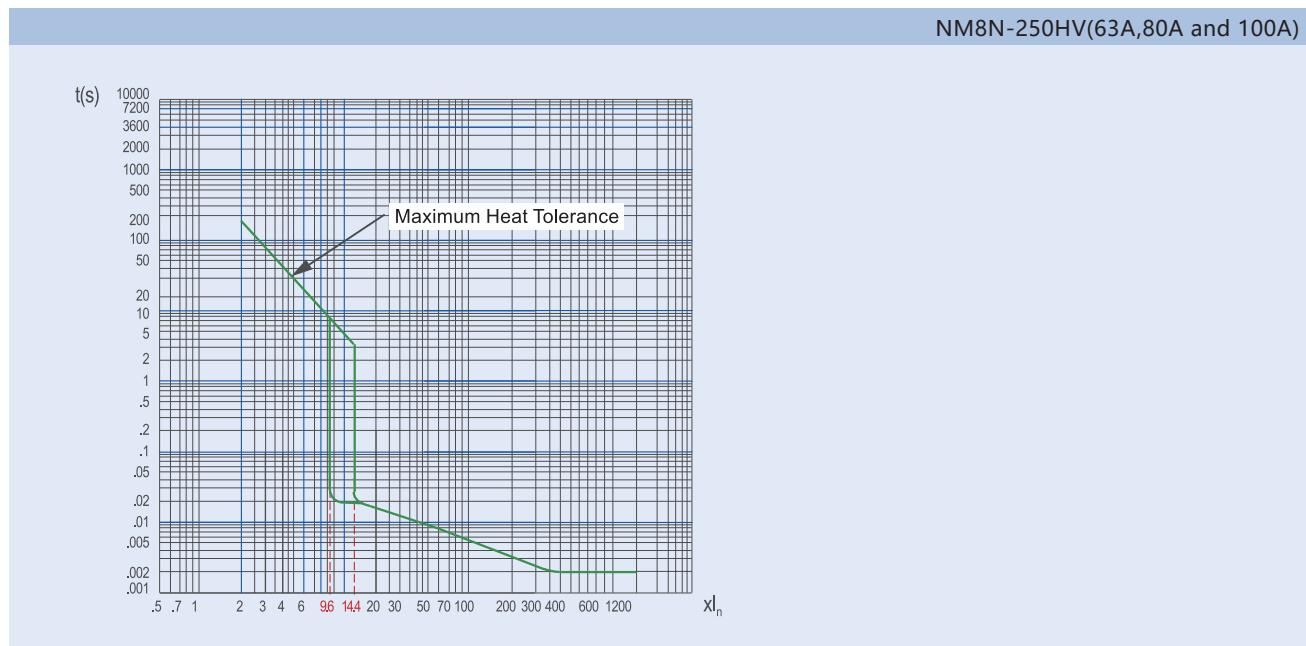

NM8N-400HV(250A,315A,350A and 400A)


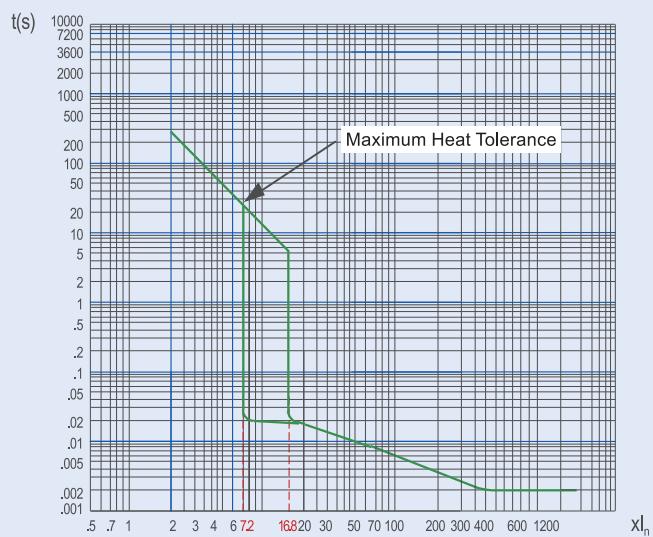


NM8N-630HV(400A,500A and 630A)


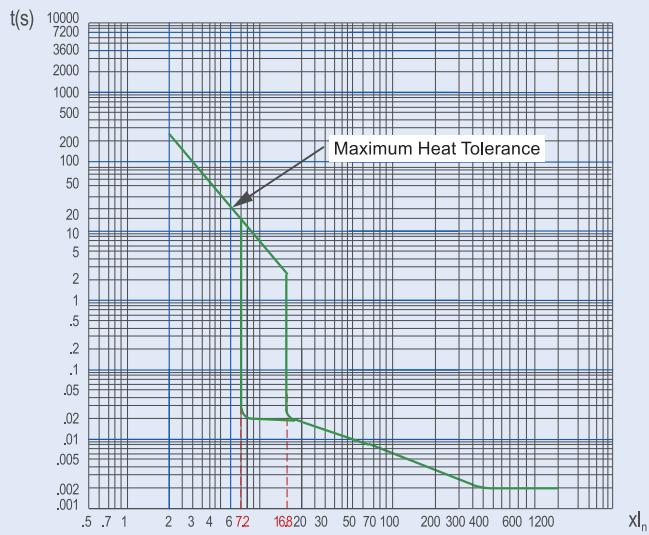


7. Mounting of circuit breaker


7.1 Modes of down-lead

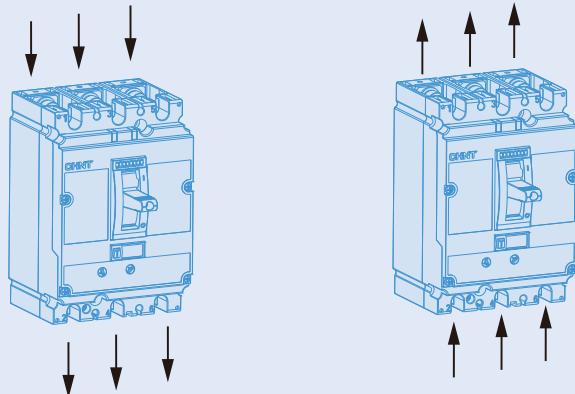

7.2 Modes of mounting

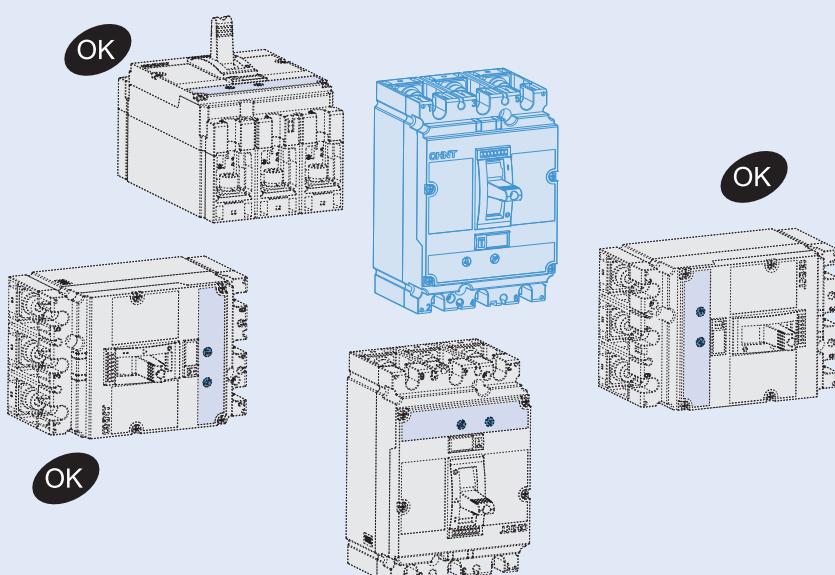


7.3 Safe distance

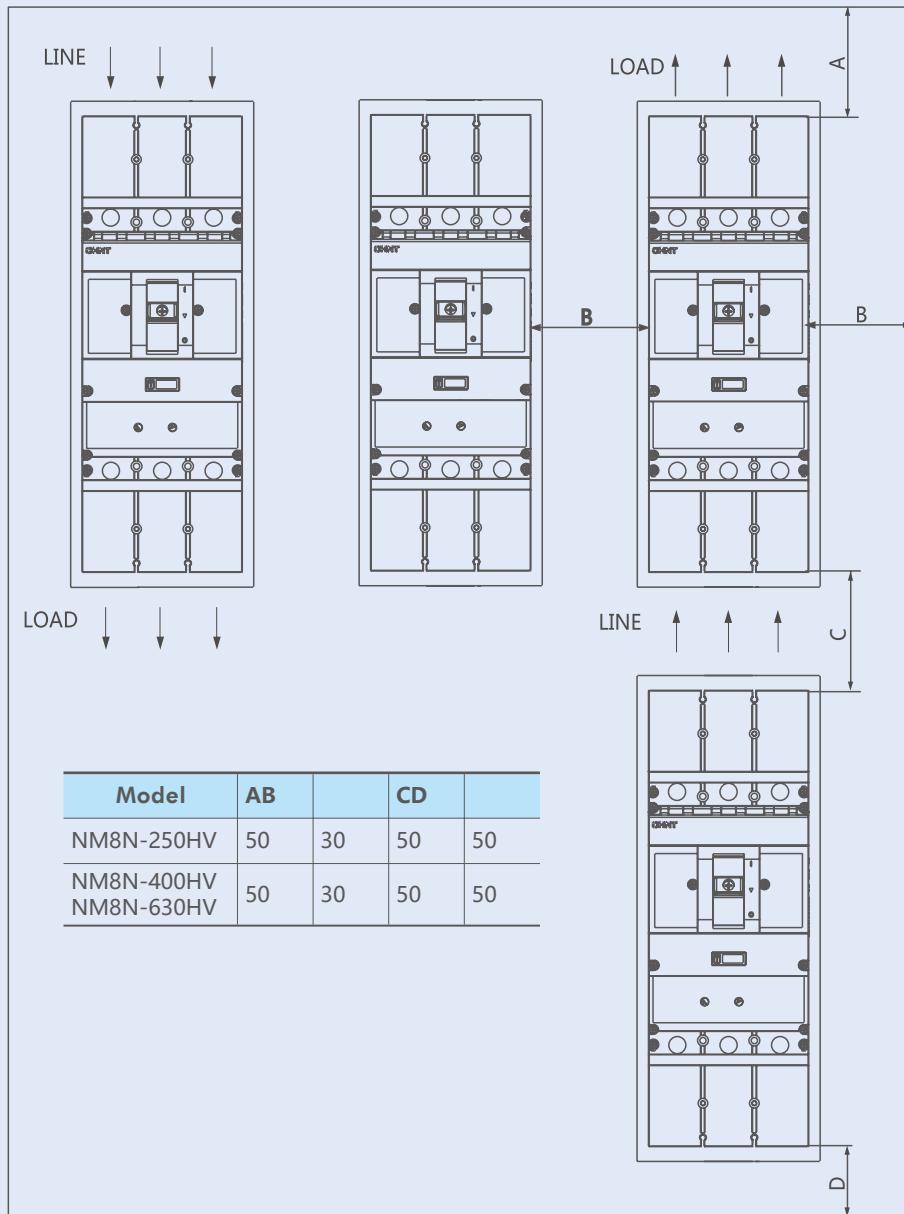


Minimum Mounting distance must be ensured.

8. Overall and Mounting Dimensions

8.1 NM8N-250HV

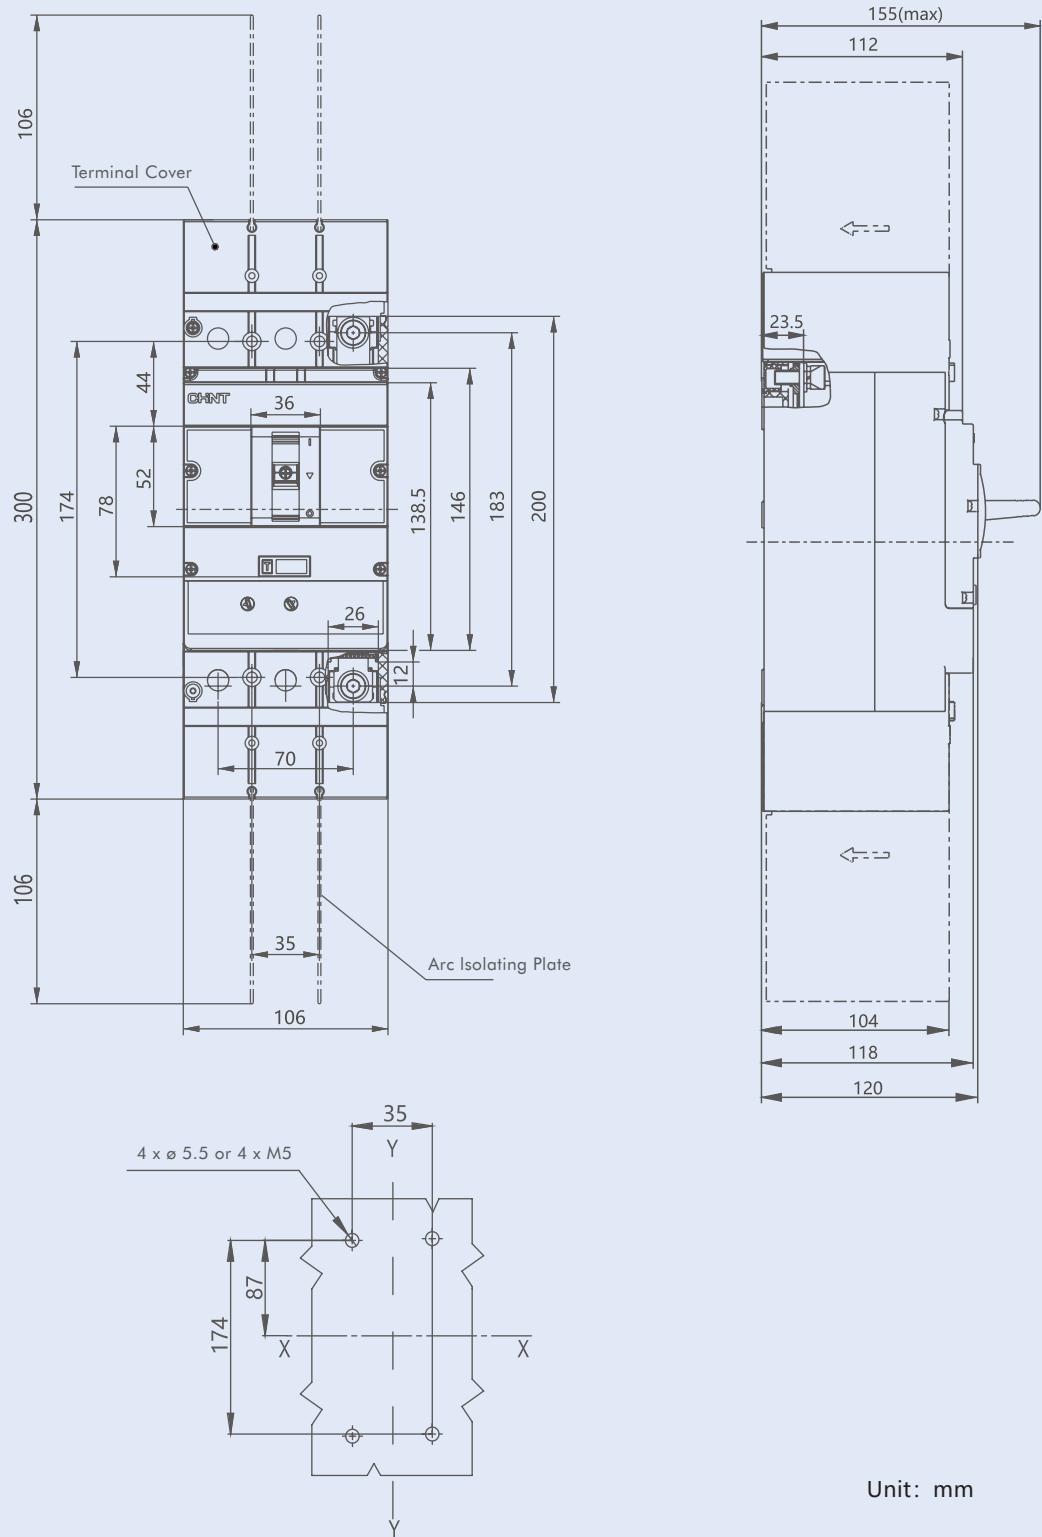


8.2 NM8N-400/630HV

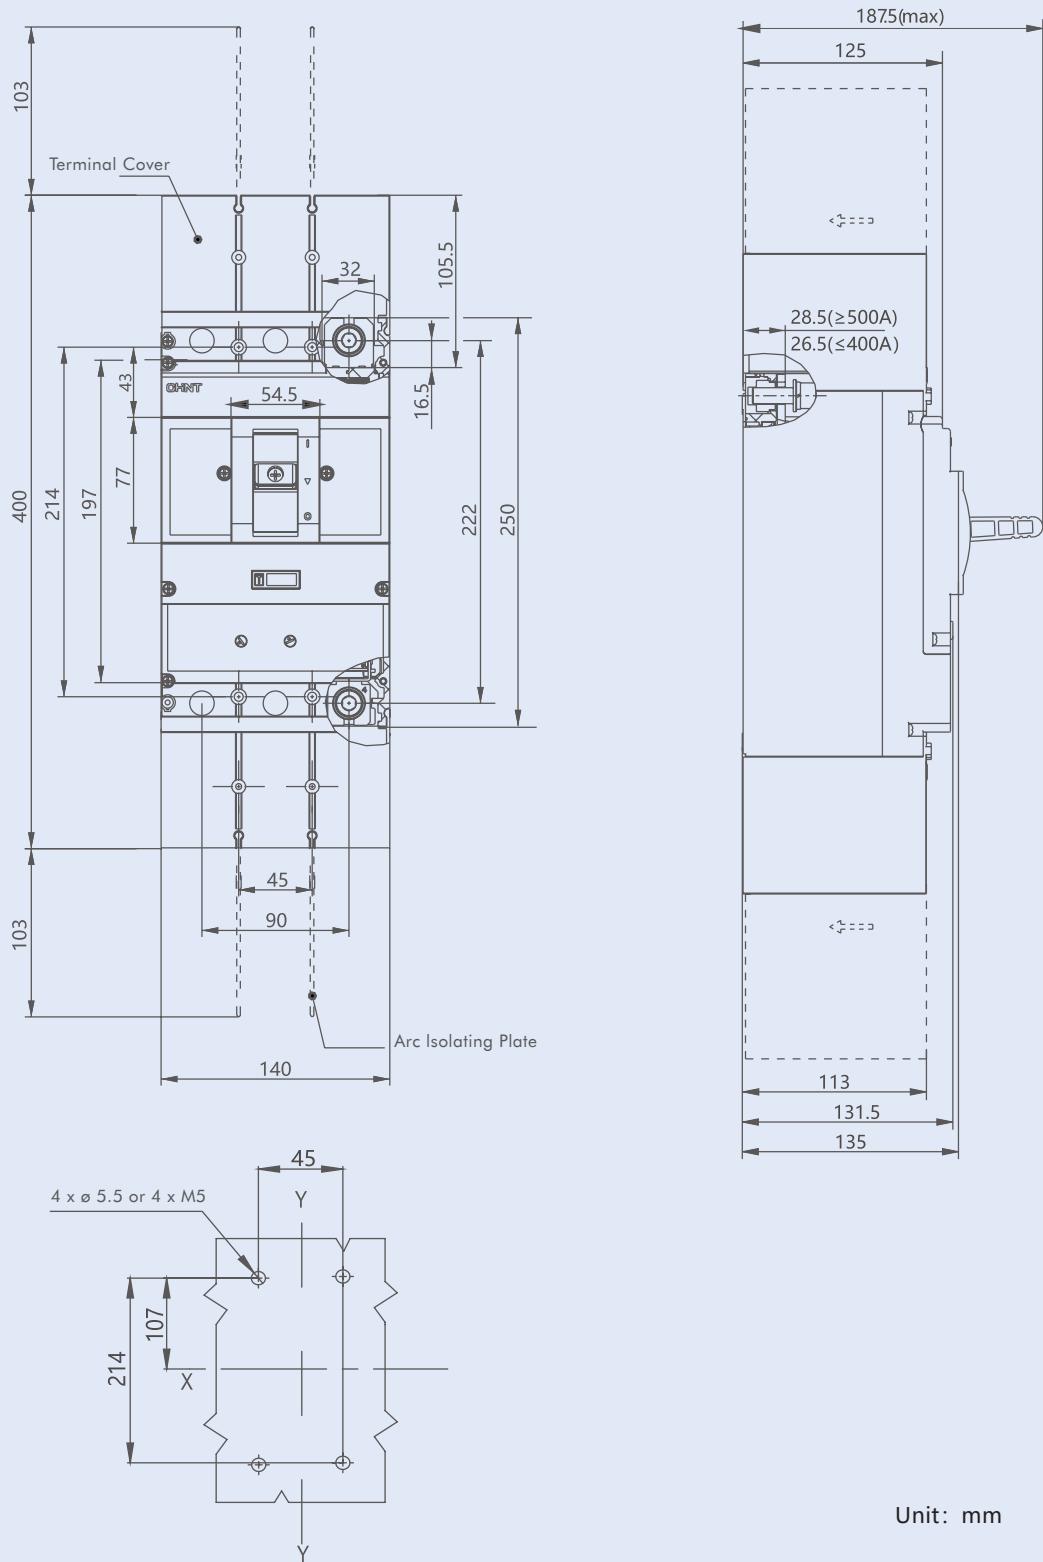


8.2 NM8N-400/630HV

NM8N-250HV

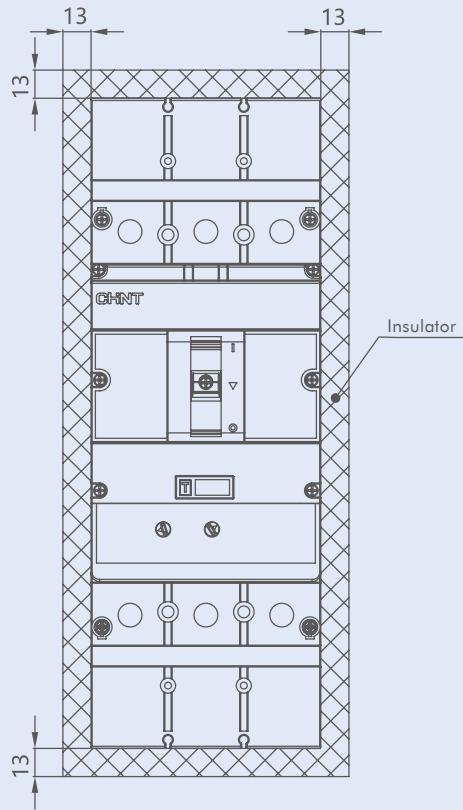


NM8N-400/630HV

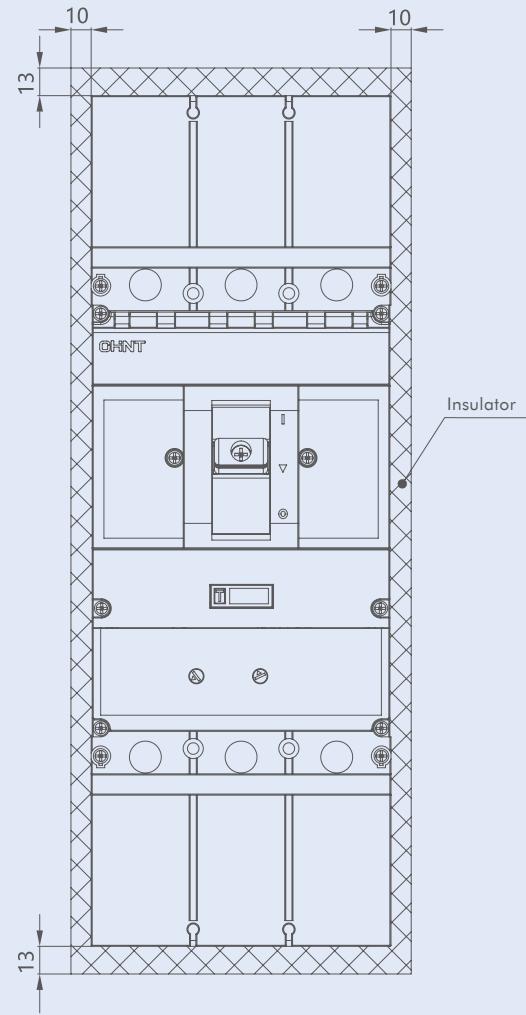

Unit: mm


8.3 Panel front hole opening

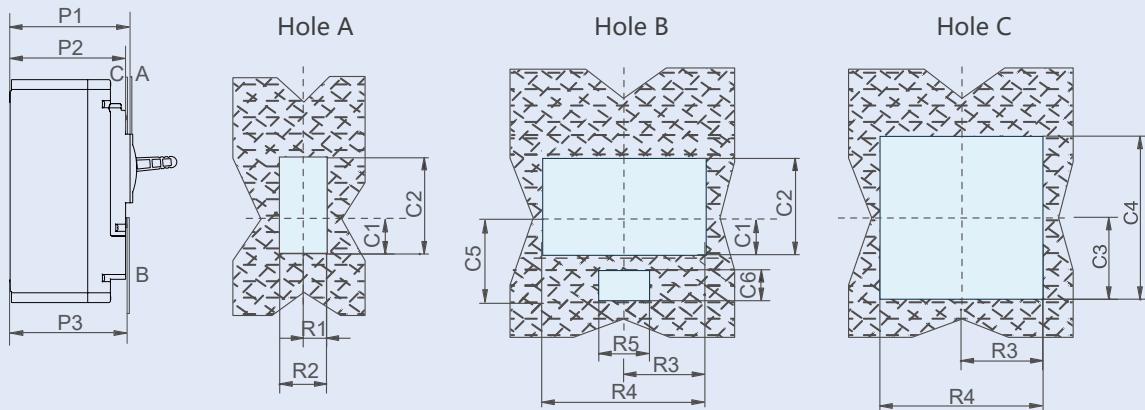


Size type	Size code	Product Model	
		NM8N-250HV	NM8N-400HV/630HV
opening size	P1	121	136
	P2	112.5	126
	P3	118.5	132
	R1	18.5	28
	R2	37	56
	R3	53.5	70.5
	R4	107	141
	R5	29	/
	C1	9.5	13.5
	C2	53	78
	C3	73.5	99
	C4	139.5	190
	C5	35.5	/
	C6	12	/

8.4 Front connection plate

NM8N-250HV

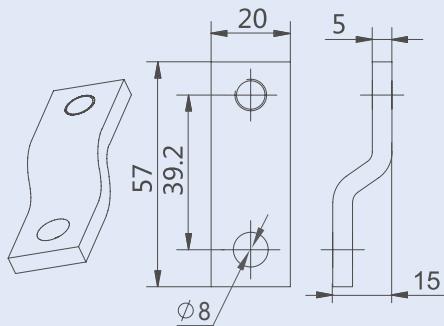


NM8N-400HV/630HV

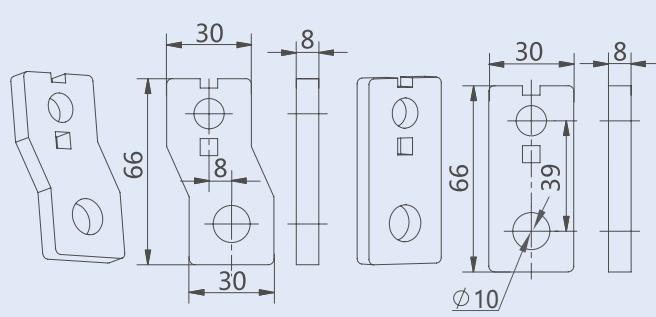

Unit: mm

8.5 Wiring

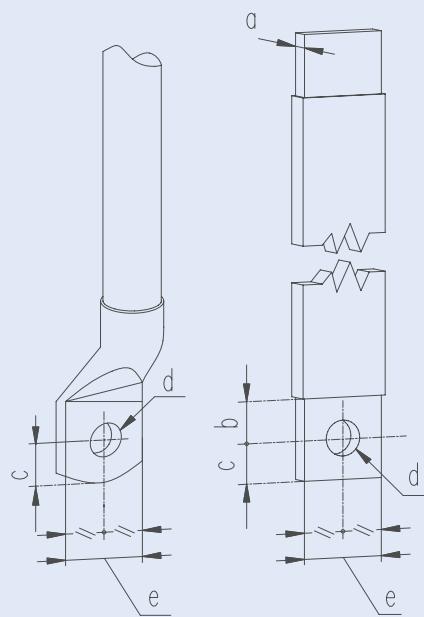

Unit: mm

Size	a	b	c	d	e
NM8N-250HV	6	≥ 9.5	≤ 12	$\Phi 8.5$	≤ 25
NM8N-400HV NM8N-630HV	8	≥ 15	≤ 12.5	$\Phi 10.5$	≤ 30

9. Accessories characteristics and installation


9.1 AX Auxiliary contact

9.1.1 Function

Remotely indicate the circuit breaker's making (on) or breaking / tripping (OFF) status, connected to the auxiliary circuit of the circuit breaker.



9.1.2 Model description

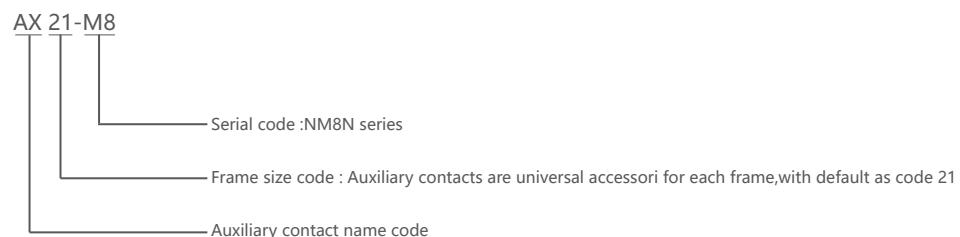


9.1.3 Circuit Breaker status indication

Breaker is at breaking / free trip status	AX12 _____ AX14 _____	AX12 _____ AX14 _____
Breaker is at making status	AX12 _____ AX14 _____	AX12 _____ AX14 _____

9.1.4 Electrical characteristics

Rated voltage (V)	Rated current (A)	
	AC-15	DC-13
AC 110	5	—
AC 240	4	—
AC 415	2	—
DC 110	—	0.25
DC 220	—	0.25

9.1.5 Wiring diagram

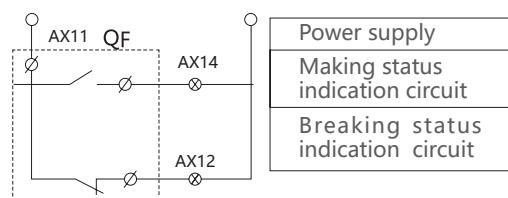

9.2 AL Alarm contact

9.2.1 Function




It is mainly used to provide a signal when the load of the circuit breaker is overloaded, short-circuited or undervoltage, or tripped.

The reasons for the failure of the alarm signal are:

- Over-load or short-circuit
- Undervoltage trip
- Manual free trip

9.2.2 Model description

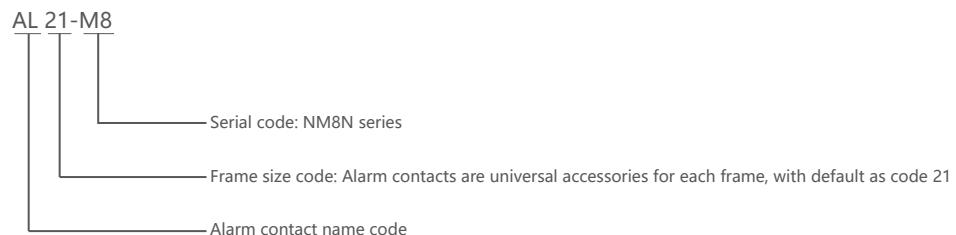


9.2.3 Circuit Breaker status indication

Breaker is at breaking / Making status	AL92 ——— ———○——— AL91
Breaker is at free trip status	AL92 ——— ———○——— AL91 AL94 ——— ———○——— AL91

9.2.4 Electrical characteristics

Rated voltage (V)	Rated current (A)	
	AC-15	DC-13
AC 110	5	—
AC 240	4	—
AC 415	2	—
DC 110	—	0.25
DC 220	—	0.25

9.2.5 Wiring diagram

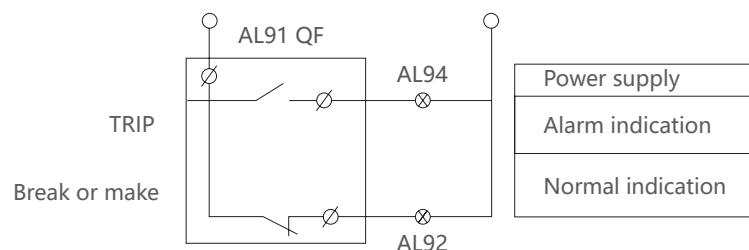


9.3 SHT Shunt release

9.3.1 Function



Shunt releases operate according to electrical signals, enabling remote control and automatic control of circuit breakers. When the supply voltage is equal to any voltage between 70% and 110% of the rated control power supply voltage, the shunt release should enable the circuit breaker to operate reliably.

9.3.2 Model description

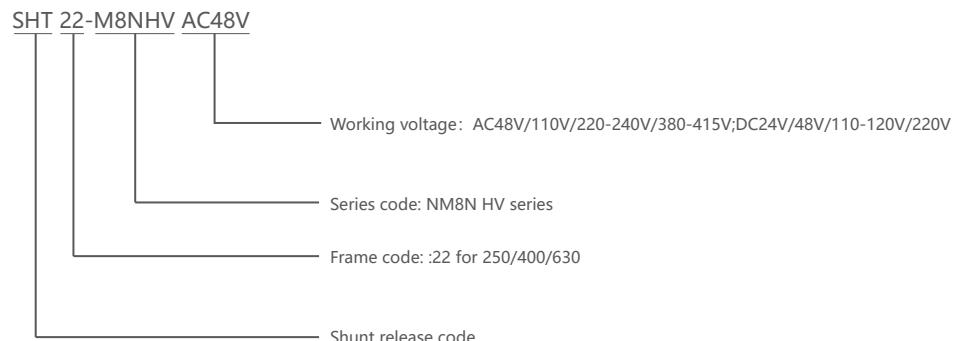

Note: Shunt release of 400/630A frame and 250A frame is compatible.


9.3.3 Electrical characteristics

Frame	Power loss (W)							
	AC48V	AC110V	AC220-240V	AC380-415V	DC24V	DC48V	DC110-120V	DC220V
250/400/630A	2.3	2.5	2.2	2.5	2.2	2.5	2.5	2.5

9.3.4 Trip characteristics

Can be powered for a long time. Response time: pulse type > 20ms,<60ms

9.3.5 Wiring diagram

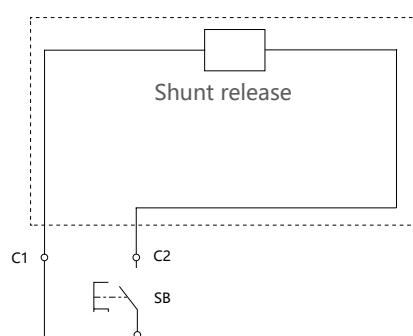

Note: When the rated control power supply voltage DC24V shunt release is used, the maximum length of the copper wire (each of the two wires) must meet the following table:

Conductor cross-sectional area rated control voltageUs(DC24V)	1.5mm ²	2.5mm ²
100%U _s	150m	250m
85%U _s	100m	160m

9.4 UVT Under-voltage release

9.4.1 Function




Realize the under-voltage protection function of the circuit breaker, open the circuit breaker when the power supply voltage is too low, and protect the electrical equipment.

- When the supply voltage drops (even slowly) to 70% to 35% of the rated control supply voltage, the undervoltage trips. The breaker should open the circuit breaker reliably.
- When the supply voltage is equal to or greater than 85% of the rated control supply voltage of the undervoltage release, the circuit breaker should be guaranteed to close.
- When the supply voltage is less than 35% of the rated control supply voltage of the undervoltage release, the undervoltage release should prevent the circuit breaker.

9.4.2 Model description

UVT 22-M8N HV AC48V

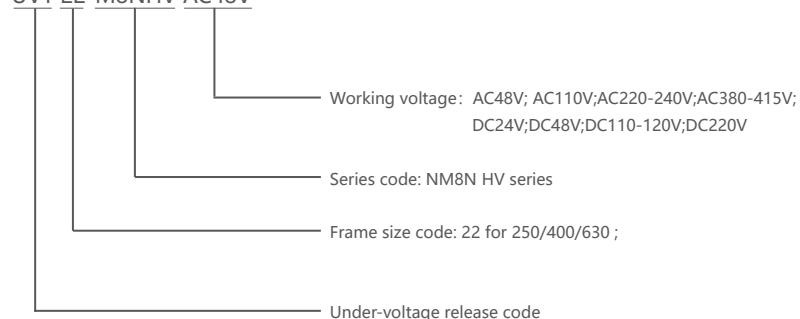


Note: Shunt release of 400/630A frame and 250A frame is compatible.

9.4.3 Electrical characteristics

Frame	Power loss (W)							
	AC48V	AC110V	AC220-240V	AC380-415V	DC24V	DC48V	DC110-120V	DC220V
250/400/630A	1.5	1.5	2.2	3	0.8	1.5	2	2.5

9.4.4 Wiring diagram




9.5 FCP front connection plate

9.5.1 Function




Make the circuit breaker have a flexible wiring mode. By installing this accessory, the pole spacing can be increased to increase the electrical gap between adjacent poles at the inlet and outlet ends of the circuit breaker and enhance the safety between lines.

9.5.2 Model description

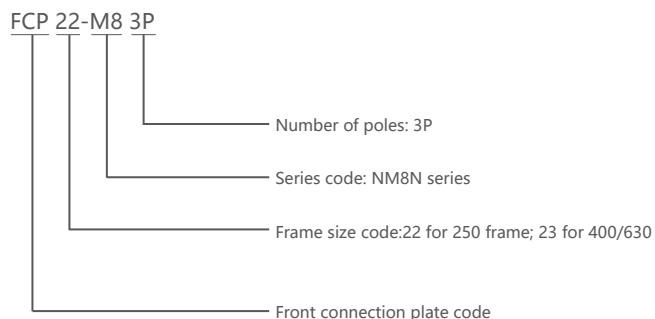


9.5.3 Internal accessories installation diagram

NM8N-250HV

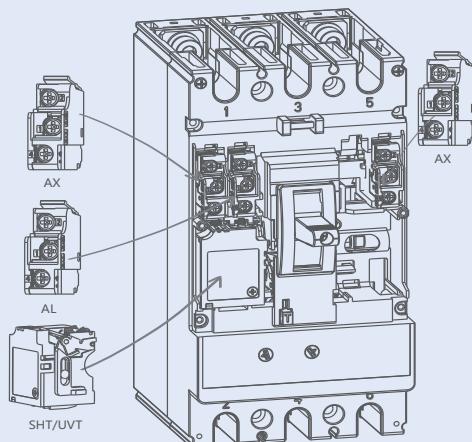

NM8N-400/630HV

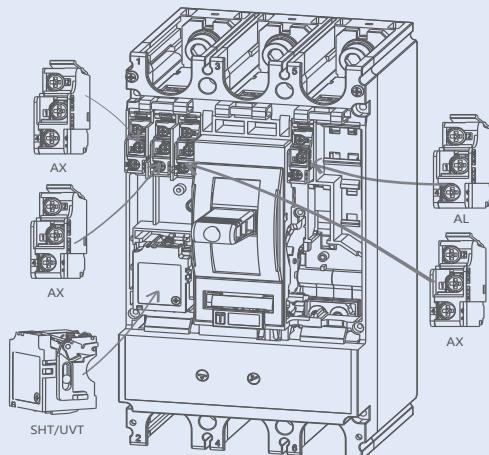

AX	Auxiliary Contact
AL	Alarm Contact
SHT	Shunt Release
UVT	Under-voltage Release

AX	ON	AX12 — AX11
	OFF	AX12 — AX11 AX14 —
AL	OFF & ON	AL92 — AL91 AL94 —
	TRIP	AL92 — AL91 AL94 —

9.6 CRH Extended rotary handle


9.6.1 Function



Using a unique design driving structure, by rotating the handle to achieve the circuit breaker closing, switch and re-close operation.


- Three position indication includes O (open), I (closed) and free tripping;
- The circuit breaker can hang 1 to 3 padlocks at OFF position, with a diameter of 5 to 8 mm, thus, in order to prevent the circuit breaker to close and switch gear to open;
- When the circuit breaker is at ON position, cabinet door cannot open under the action of the rotating handle (cabinet door can be opened by the emergency unlocking device on the handle in emergency situation).

9.6.2 Model description

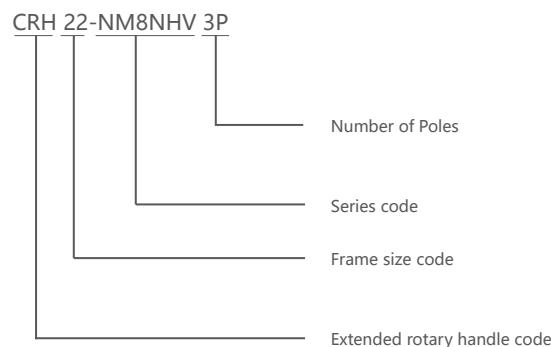


9.6.3 Handle size drawing

NM8N-250HV

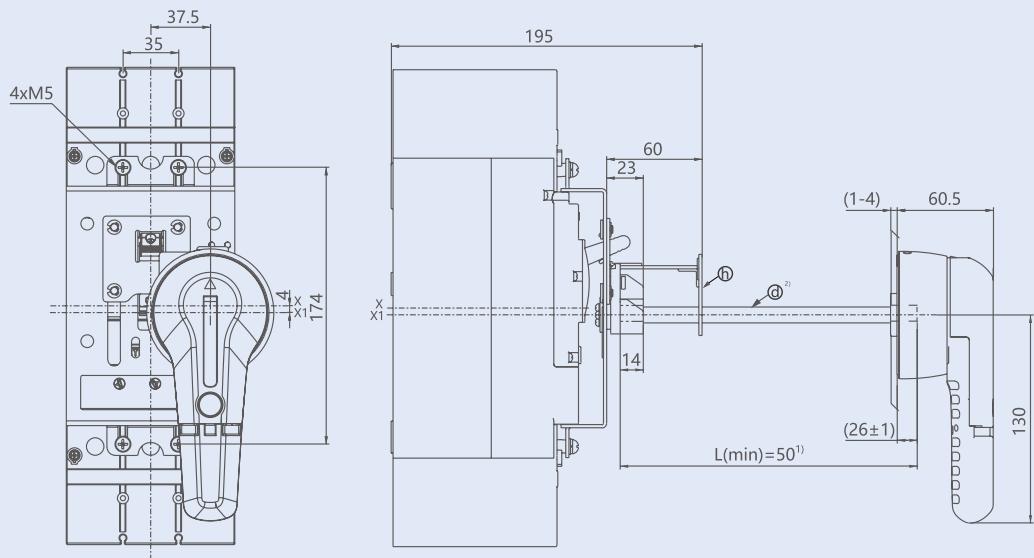

Note: 1) When $L \geq 150$, in order to avoid the shaft sagging, h support plate need to be installed; When $50 \leq L \leq 90$, support plate is not needed;
 2) Standard length of rotating shaft $L=320$.


NM8N-400/630HV

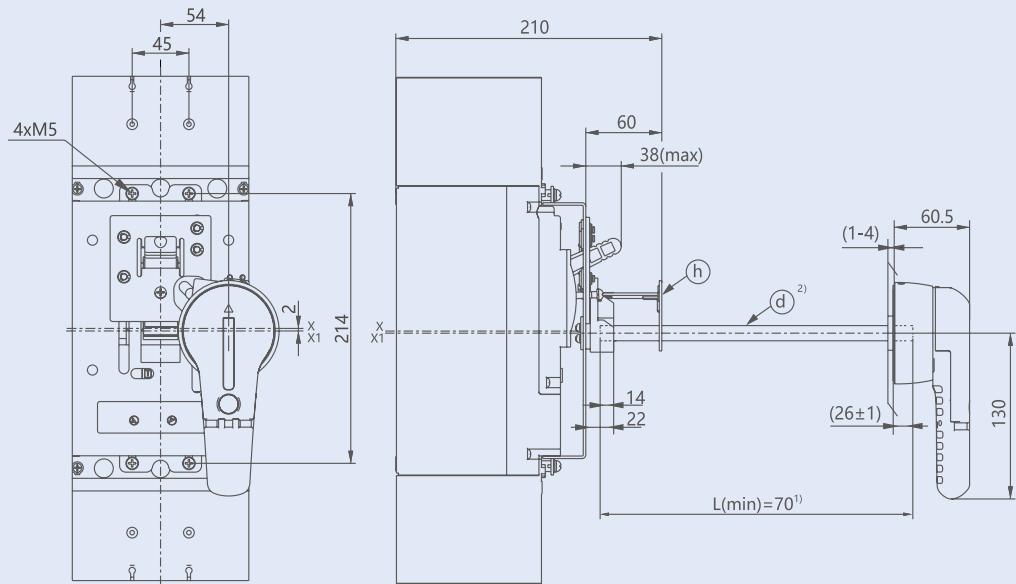


Note: 1) When $L \geq 150$, in order to avoid the shaft sagging, h support plate need to be installed; When $70 \leq L \leq 90$, support plate is not needed;
 2) Standard length of rotating shaft $L=260$.

9.6.4 Installation diagram

NM8N-250HV

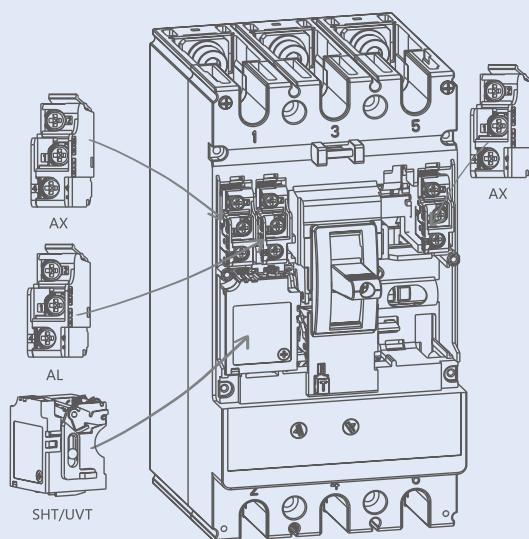

NM8N-400/630HV

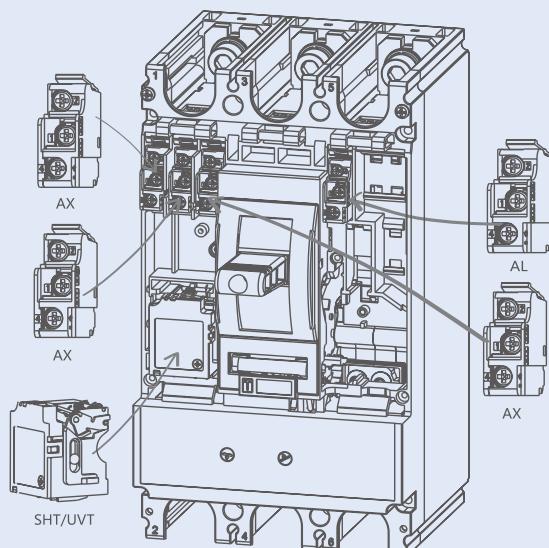

AX	Auxiliary Contact
AL	Alarm Contact
SHT	Shunt Release
UVT	Under-voltage Release

AX	ON	AX12 —— AX11 AX14 ——
	OFF	AX12 —— AX11 AX14 ——
AL	OFF & ON	AL92 —— AL91 AL94 ——
	TRIP	AL92 —— AL91 AL94 ——

10. Supplemented Technical Information

10.1 Power loss

Altitude derating coefficient table	Product model current (A)	Rated current (A)	Fixed breaker internal resistance per pole (mΩ)	Power loss per pole (W)
NM8N-250HV	63	63	1.7	6.7
	80	80	1.3	8.3
	100	100	0.88	8.8
	125	125	0.7	10.9
	160	160	0.55	14.1
	180	180	0.55	17.8
	200	200	0.55	22.0
	225	225	0.4	20.3
	250	250	0.4	25.0
NM8N-400HV/630HV	250	250	0.35	21.9
	315	315	0.25	24.8
	350	350	0.25	30.6
	400	400	0.20	32.0
	500	500	0.12	30.0
	630	630	0.12	47.6

10.2 Temperature compensation coefficient table


Air temperature Rated current (A)	Air temperature													
	-40°C	-35°C	-25°C	-15°C	-5°C	0°C	10°C	20°C	30°C	40°C	50°C	60°C	70°C	
NM8N-250HV	63	88	86.5	83	80	77	75	72	69	66	63	58.5	53	46
	80	112	110	106	102	98	96	92	88	84	80	74.5	67	56
	100	140	137	132	127	122	120	115	110	105	100	93	84	80
	125	175	172	165	159	153	150	144	137	131	125	118	106	96
	160	224	220	212	204	196	192	184	176	168	160	152	136	120
	180	252	247	238	229	220	216	207	198	189	180	171	157	144
	200	280	275	265	255	245	240	230	220	210	200	190	175	166
	225	315	309	300	288	276	270	259	247	236	225	213	196	180
	250	350	343	332	319	306	300	287	275	262	250	237	218	207
NM8N-400HV/630HV	250	350	343	332	319	306	300	287	275	262	250	237	225	212
	315	441	433	418	402	386	378	362	346	331	315	300	286	271
	350	490	481	465	447	429	420	402	385	367	350	332	295	276
	400	560	550	530	510	490	480	460	440	420	400	380	360	320
	500	700	687	662	637	612	600	575	550	525	500	450	406	360
	630	882	865	834	802	770	756	725	693	661	630	567	511	454

10.3 Altitude derating coefficient table

Altitude (m)	2000m	3000m	4000m	5000m
Rated current (A)	$1 \times I_n$	$0.96 \times I_n$	$0.93 \times I_n$	$0.9 \times I_n$
Rated voltage Ue (V)	1150	1030	950	850
Rated insulation voltage Ui (V)	1250	1120	1000	880
Dielectric properties (V)	2550	2300	2050	1800
Rated impulse withstand voltage	NM8N-250HV NM8N-400HV NM8N-630HV	8 12	8 10	8 8

NM8N	-	630	HV	630	TM	630	3P
MCCB	Fame current	High voltage	Breaking capacity	Release Code	Rated current	Number of poles	
	250:250A 400:400A 630:630A		@AC800V C:36kA S:50kA	TM:Theromagnetic M:Magentic	250:63-80-100-125-160-180- 225-250 400:250-315-350-400 630:400-500-630	3 poles	

Diagram	In	Icu@800v	Ics@800v	Description	Order code
NM8N-HV	100A	36kA	36kA	NM8N-250HVC TM 100 3P	367764
	125A	36kA	36kA	NM8N-250HVC TM 125 3P	367765
	160A	36kA	36kA	NM8N-250HVC TM 160 3P	367766
	180A	36kA	36kA	NM8N-250HVC TM 180 3P	367768
	200A	36kA	36kA	NM8N-250HVC TM 200 3P	367769
	225A	36kA	36kA	NM8N-250HVC TM 225 3P	367767
	250A	36kA	36kA	NM8N-250HVC TM 250 3P	367770
	63A	36kA	36kA	NM8N-250HVC TM 63 3P	367762
	80A	36kA	36kA	NM8N-250HVC TM 80 3P	367763
	100A	50kA	50kA	NM8N-250HVS TM 100 3P	367772
	125A	50kA	50kA	NM8N-250HVS TM 125 3P	367775
	160A	50kA	50kA	NM8N-250HVS TM 160 3P	367777
	180A	50kA	50kA	NM8N-250HVS TM 180 3P	367776
	200A	50kA	50kA	NM8N-250HVS TM 200 3P	367774
	225A	50kA	50kA	NM8N-250HVS TM 225 3P	367778
	250A	50kA	50kA	NM8N-250HVS TM 250 3P	367779
	63A	50kA	50kA	NM8N-250HVS TM 63 3P	367771
	80A	50kA	50kA	NM8N-250HVS TM 80 3P	367773
	250A	36kA	36kA	NM8N-400HVC TM 250 3P	367780
	315A	36kA	36kA	NM8N-400HVC TM 315 3P	367781
	350A	36kA	36kA	NM8N-400HVC TM 350 3P	367784
	400A	36kA	36kA	NM8N-400HVC TM 400 3P	367783
	250A	50kA	50kA	NM8N-400HVS TM 250 3P	367782
	315A	50kA	50kA	NM8N-400HVS TM 315 3P	367785
	350A	50kA	50kA	NM8N-400HVS TM 350 3P	367786
	400A	50kA	50kA	NM8N-400HVS TM 400 3P	367787
	400A	36kA	36kA	NM8N-630HVC TM 400 3P	367789
	500A	36kA	36kA	NM8N-630HVC TM 500 3P	367788
	630A	36kA	36kA	NM8N-630HVC TM 630 3P	367790
	400A	50kA	50kA	NM8N-630HVS TM 400 3P	367791
	500A	50kA	50kA	NM8N-630HVS TM 500 3P	367792
	630A	50kA	50kA	NM8N-630HVS TM 630 3P	367793

No	category	Picture	Frame Size	voltage	description	ordering code
1	Auxiliary		ALL		AX21-M8	265343
2	Alarm		ALL		AL21-M8	265345
3	Front connection plate		125		FCP21-M8 1P	269702
					FCP21-M8 2P	269703
					FCP21-M8 3P	269704
					FCP21-M8 4P	269705
			250		FCP22-M8 1P	269706
					FCP22-M8 2P	269707
					FCP22-M8 3P	269708
					FCP22-M8 4P	269709
			400/630		FCP23-M8 3P	269710
					FCP23-M8 4P	269711
4	Undervoltage Release		250	AC110V	SHT22-M8NHV AC110V	434035
				AC220-240V	SHT22-M8NHV AC220-240V	434034
				AC380-415V	SHT22-M8NHV AC380-415V	434033
				DC110-120V	SHT22-M8NHV DC110-120V	434037
				DC220V	SHT22-M8NHV DC220V	434036
				DC24V	SHT22-M8NHV DC24V	434038
			400/630	AC110V	SHT23-M8NHV AC110V	528985
				AC220-240V	SHT23-M8NHV AC220-240V	528986
				AC380-415V	SHT23-M8NHV AC380-415V	528987
				DC110-120V	SHT23-M8NHV DC110V-120V	528988
				DC220V	SHT23-M8NHV DC220V	528989
				DC24V	SHT23-M8NHV DC24V	528990
5	Extended Rotary Handle		250	AC110V	UVT22-M8NHV AC110V	434041
				AC220-240V	UVT22-M8NHV AC220-240V	434040
				AC380-415V	UVT22-M8NHV AC380-415V	434039
				DC110-120V	UVT22-M8NHV DC110-120V	434043
				DC220V	UVT22-M8NHV DC220V	434042
				DC24V	UVT22-M8NHV DC24V	434044
			400/630	AC110V	UVT23-M8NHV AC110V	528991
				AC220-240V	UVT23-M8NHV AC220-240V	528992
				AC380-415V	UVT23-M8NHV AC380-415V	528993
				DC110-120V	UVT23-M8NHV DC110-120V	528994
				DC220V	UVT23-M8NHV DC220V	528995
				DC24V	UVT23-M8NHV DC24V	528996
6	Extended Rotary Handle		250/400		CRH22-M8NHV 3P	406594
					CRH23-M8NHV 3P	406595
			630		LHD23-M8NHV	434434
8	Motor Operator		250	AC110/DC110-120V	MOD22-M8NHV AC110/DC110-120V	480096
				AC220-240V/DC220V	MOD22-M8NHV AC220-240V/DC220V	480097
				AC380-415V	MOD22-M8NHV AC380-415V	480098
				DC24V	MOD22-M8NHV DC24V	480099
			400/630	AC110/DC110-120V	MOD23-M8NHV AC110/DC110-120V	475983
				AC220-240V/DC220V	MOD23-M8NHV AC220-240V/DC220V	475984
				AC380-415V	MOD23-M8NHV AC380-415V	475985
				DC24V	MOD23-M8NHV DC24V	475986