

OUVT-1 Over/under voltage release

1. Major function

To be assembled with circuit breaker to achieve over/under voltage protection.

2. Parameters and performance

Rated operation voltage U_e : AC 240V, 50Hz;

Overvoltage operation setting value U_{vo} : 280V;

Rated insulation voltage U_i : 500V;


Tripping characteristics: the release is assembled with NXB-63 series circuit breaker. When the applied voltage is reduced to 35% U_e or increased to 95% ~ 105% of the over-voltage setting value, the release should drive the circuit breaker to act. When the applied voltage is below 35% U_e or above 105% of the over-voltage setting value, the release should be able to prevent the circuit breaker from closing. When the supply voltage is above 85% U_e and below 95% of over-voltage setting value, the circuit breaker should be able to close normally. The upper limit of the applied voltage should be less than 110% over-voltage operation setting value.

Mechanical and electrical life: the mechanical and electrical life after the release is assembled with the circuit breaker should be ≥ 4000 cycles, of which, 500 cycles for over-voltage trip and under-voltage trip each, and 3000 cycles for the open/close of the circuit breaker.

3. Assembly and installation of the product

OUVT-1 can be assembled with NB1-63 series circuit breaker, with the assembly diagram shown below:

Figure 1

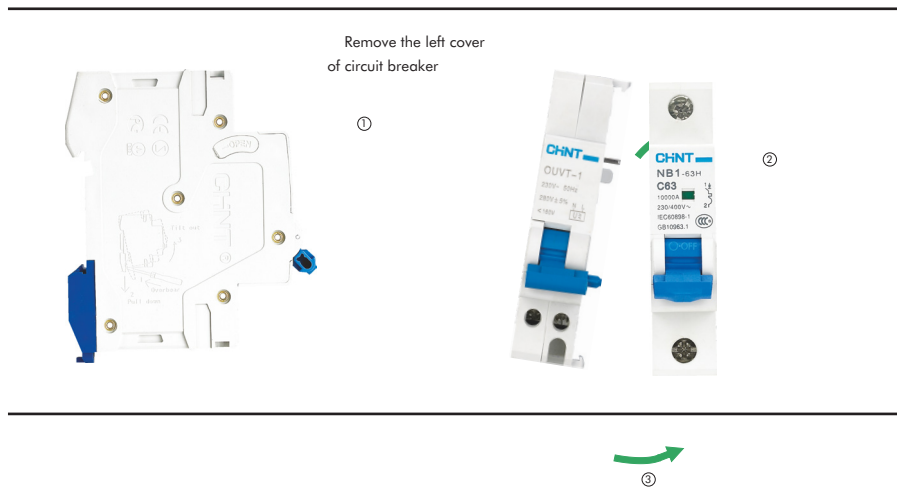

After OUVT-1 is assembled with the circuit breaker, mount them on the TH3.5-7.5 steel mounting rail.

4. Dimensions and installation sizes

Figure 2

