




JSZ6 Time Delay Relay

1. General

JSZ6 Time Delay Relay is applicable for automatic control system, such as machine tool automatic control, complete equipment automatic control. Etc.



2. Type designation

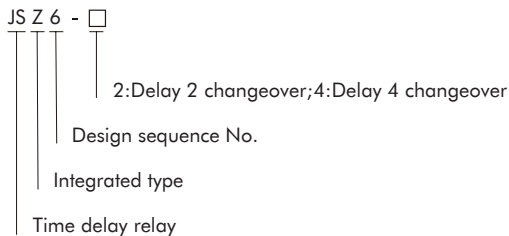

3. Technical data


Type	JSZ6-2	JSZ6-4
Operating mode	power on delay	power on delay
Contact number	Delay 2 changeover	Delay 4 changeover
Contact capacity	Ue/Ie: AC-15 240V/0.75A,415V/0.47A; DC-13 220V/0.27A; Ith:5A	
Delay range	(0.1-1)s,(0.5-5)s,(1-10)s,(3-30)s,(15-180)s, (1-10)min,(3-30) min	
Rated control supply voltage	50Hz/60Hz AC24V, AC36V, AC110V, AC127V, AC220V; DC12V, DC2	
Allowable fluctuation range of rated control power supply voltage	85%Us~110%Us	
Electrical life	1 × 10 ⁵	
Mechanical life	1 × 10 ⁶	
Set mode	Potentiometer	
Repeat precision	≤10%	
Ambient temperature	-5°C ~ +40°C	
Interchangeability	Can interchange with H3Y series for use	
Matched pedestal:	CZY08A-02、CZY08A-E、CZY08B-01、CZY14A、CZY14B、CZY14B-E	

4. Wiring diagram

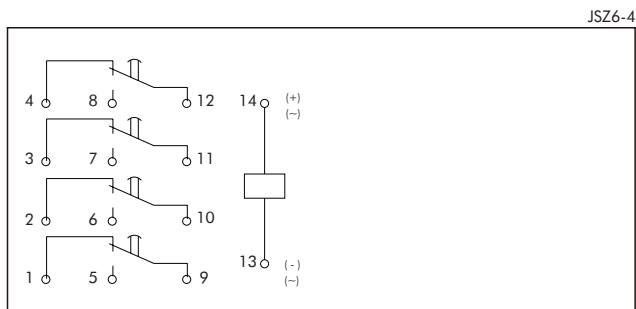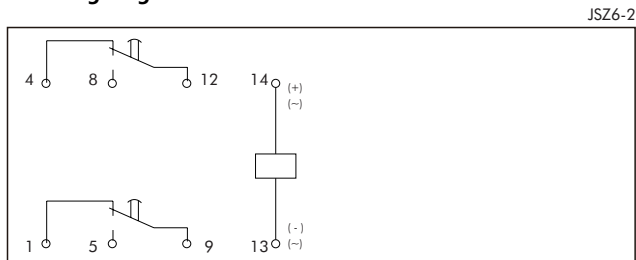

5. Overall and mounting dimensions (mm)

JSZ6 overall and mounting dimension

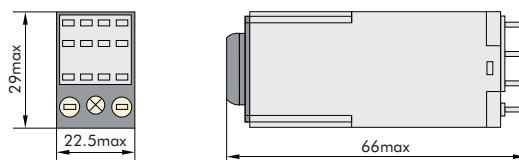

Opening size

